
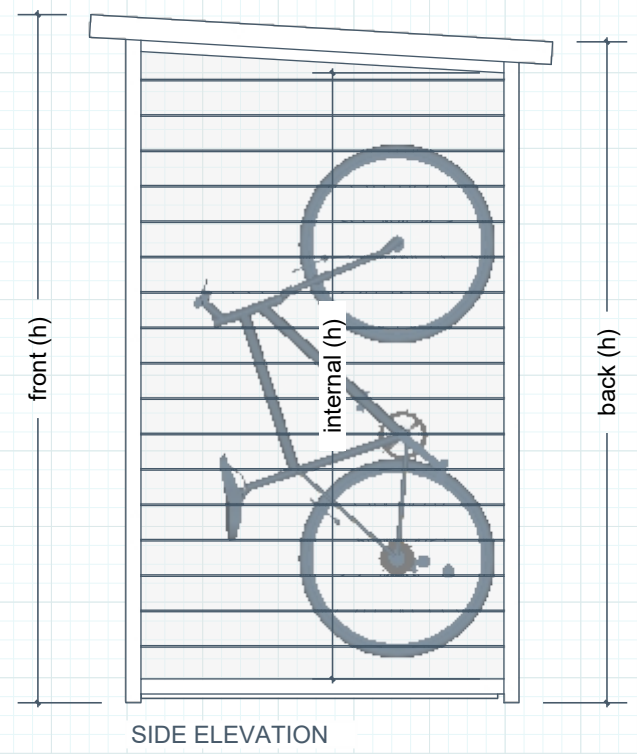


V-SHED RANGE

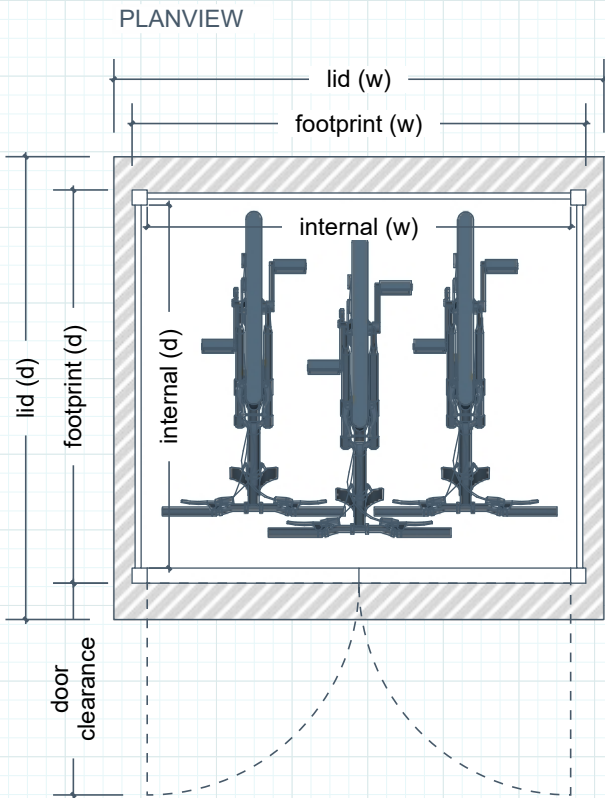

V-SHED	FOOTPRINT		LID		HEIGHT		INTERNAL			DOOR CLEARANCE	
	WIDTH	DEPTH	WIDTH	DEPTH	BACK	FRONT	HEIGHT	WIDTH	DEPTH	STD DOORS	BIFOLD DOORS
3	1500	1300	1620	1530	2110	2200	1930	1400	1200	715	-
4	1850	1300	1970	1530	2110	2200	1930	1750	1200	890	436
5	2200	1300	2320	1530	2110	2200	1930	2100	1200	1065	525
6	2550	1300	2670	1530	2110	2200	1930	2450	1200	-	610

All timber is UK Grown Kiln Dried Douglas Fir.
 Exterior High Grade Plywood Floor (Painted), Shelf & Roof.
 Tough, Flexible EPDM Rubber Roof Membrane

Hardware included in all V-Shed Models:

- Adjustable Metal Feet
- Stainless Steel Hinges
- Strong Door Drop Bolts
- Two Keyed Alike Deadbolt Locks
- Steel Full Width Anchor Bar

SOLID BASE REQUIRED			TYPES OF BASE:
V-SHED	WIDTH	DEPTH	
3	1600	1500	<ul style="list-style-type: none"> • Concrete Pad • Eco Grid & Shingle • Paving Slabs/Brick • Tarmac/Resin Bound Surfacing Unsuitable Bases include soil or loose shingle - anything that is not compact & solid.
4	1900	1500	
5	2300	1500	
6	2600	1500	